



# 3. BLOCK DIAGRAM AND SCHEMATIC DIAGRAM

## 3.1 BLOCK DIAGRAM


### 3.1.1 OVERALL DIAGRAM

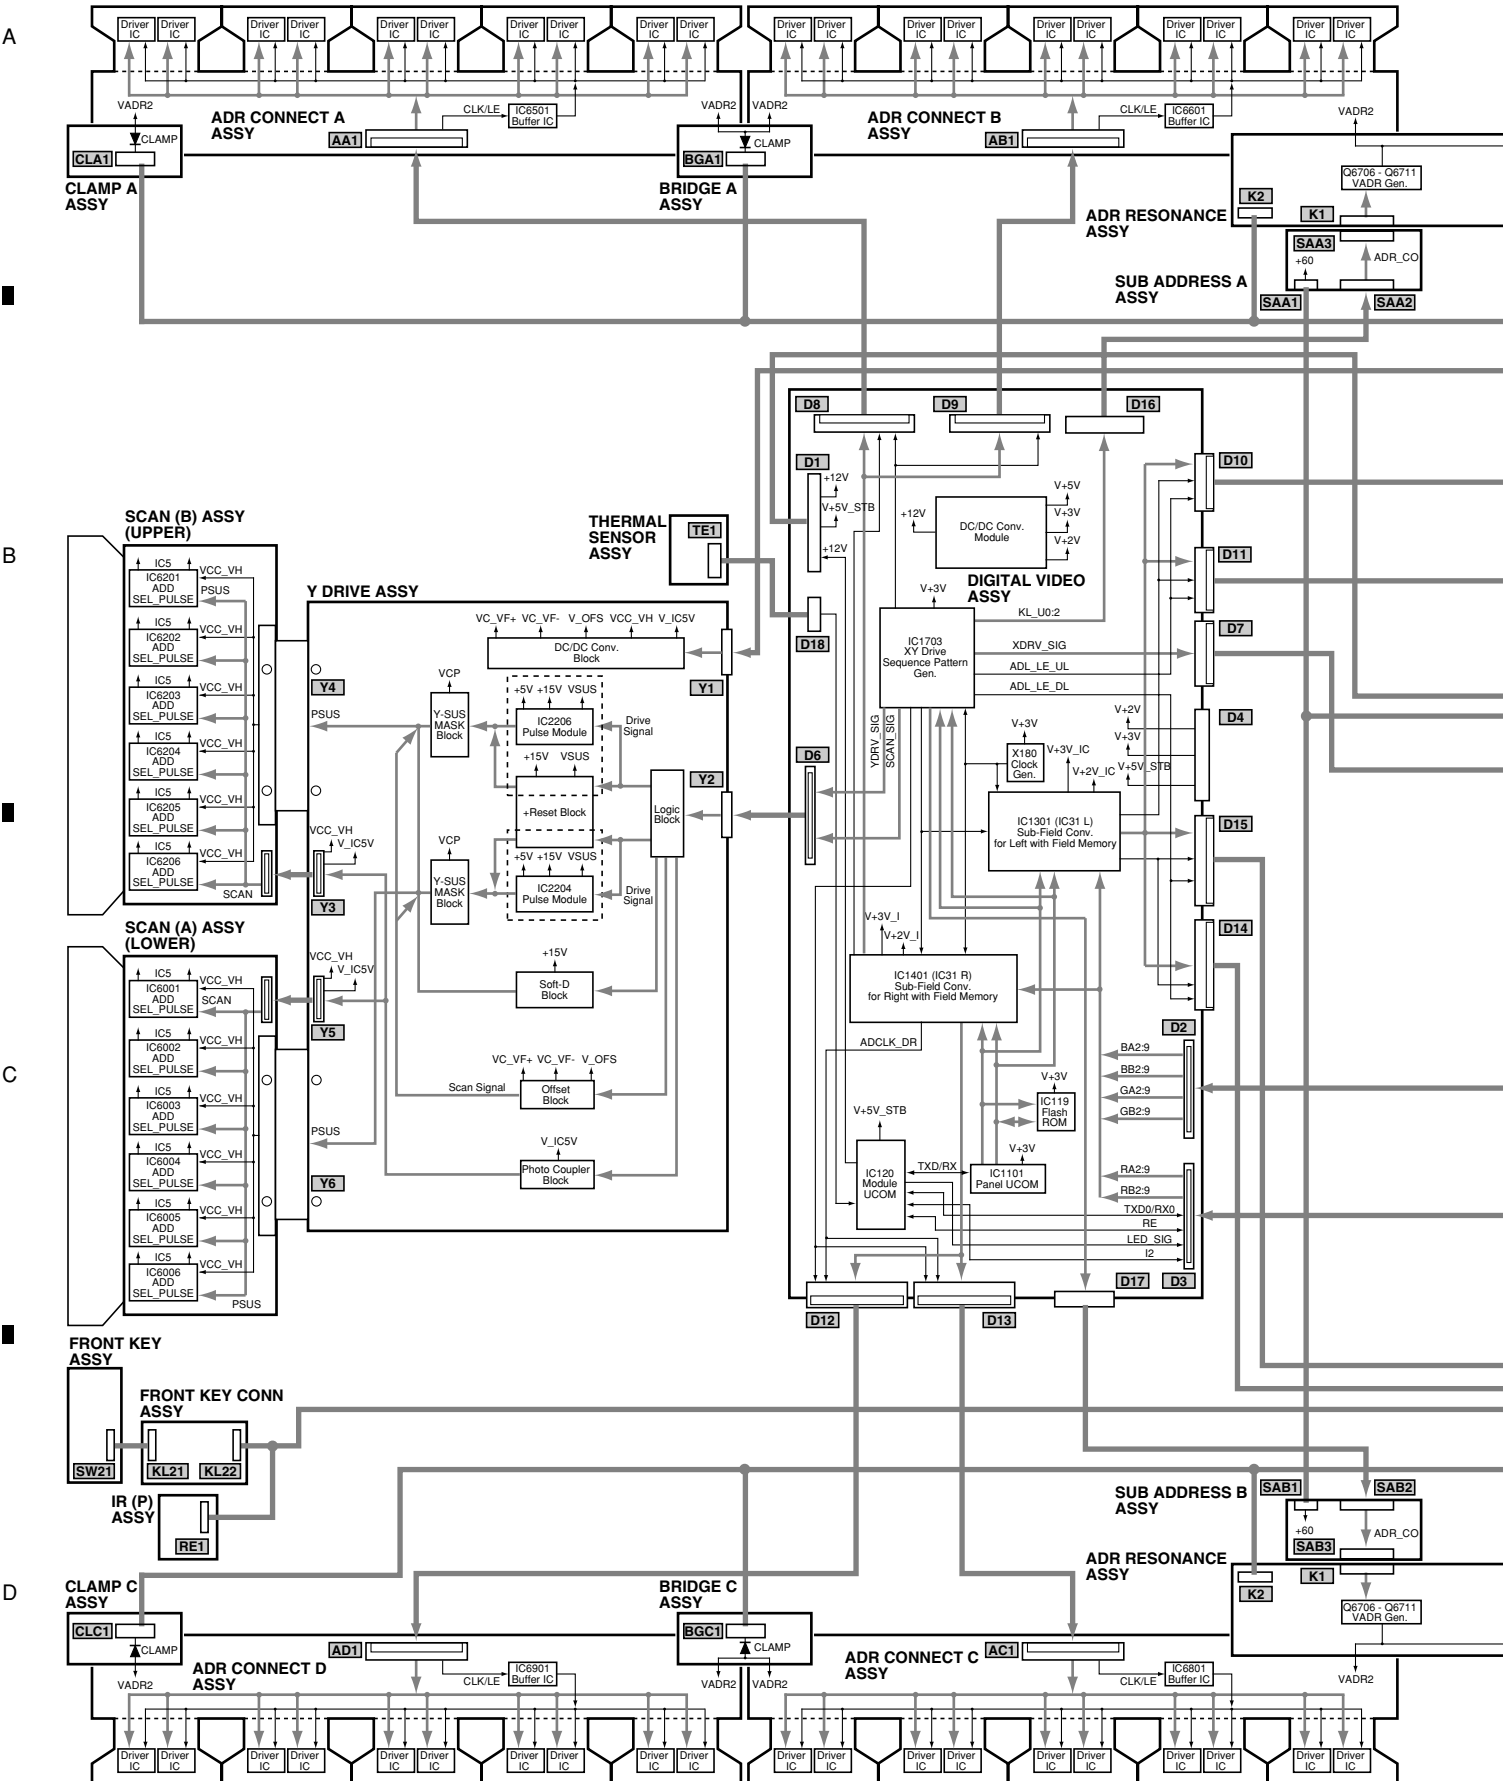

Note : When ordering service parts, be sure to refer to "EXPLODED VIEWS and PARTS LIST" or "PCB PARTS LIST".

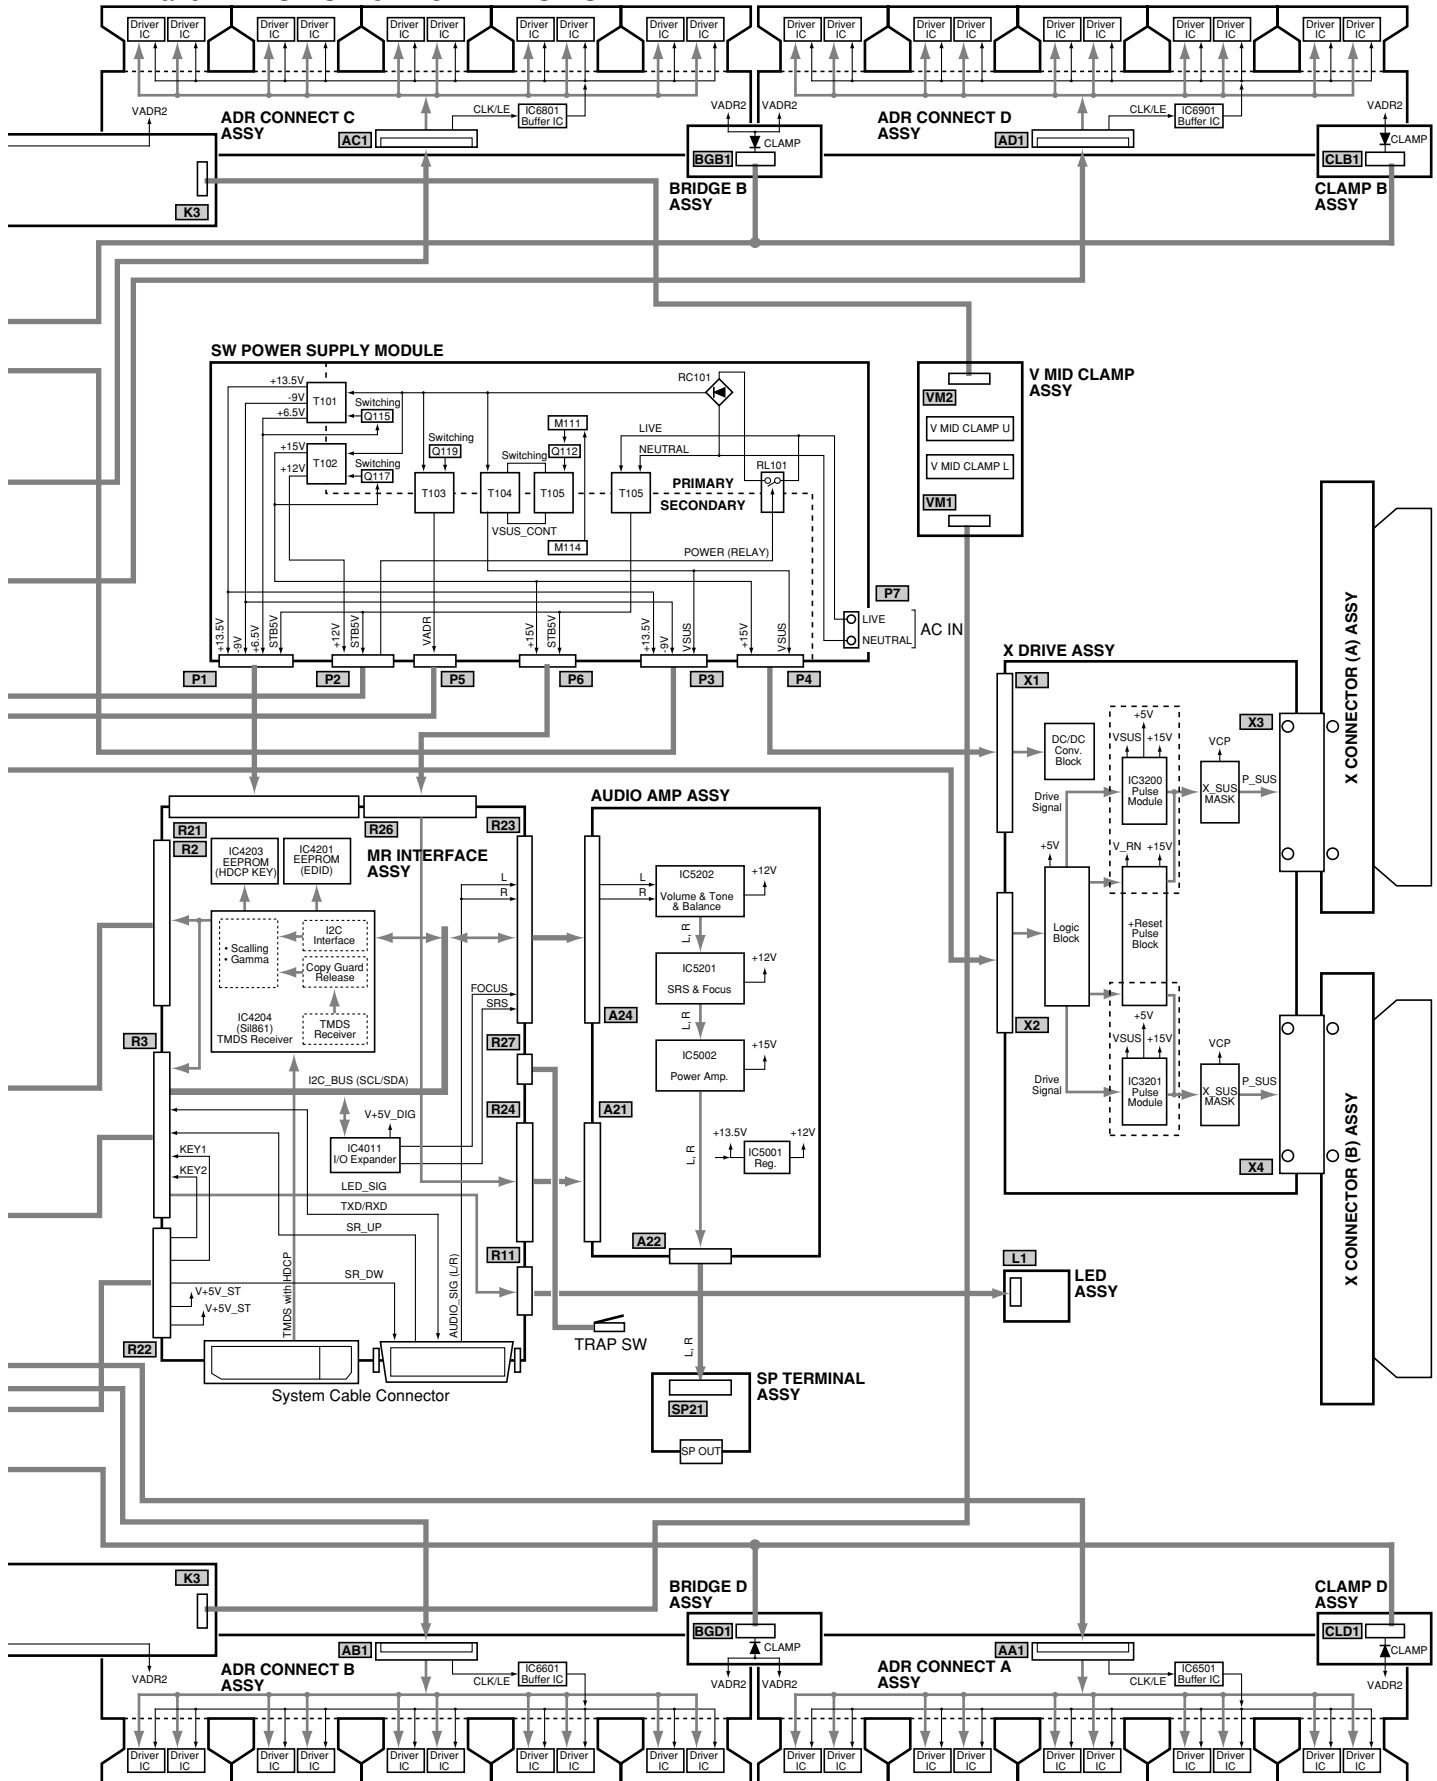

3.1.2 MR INTERFACE ASSY

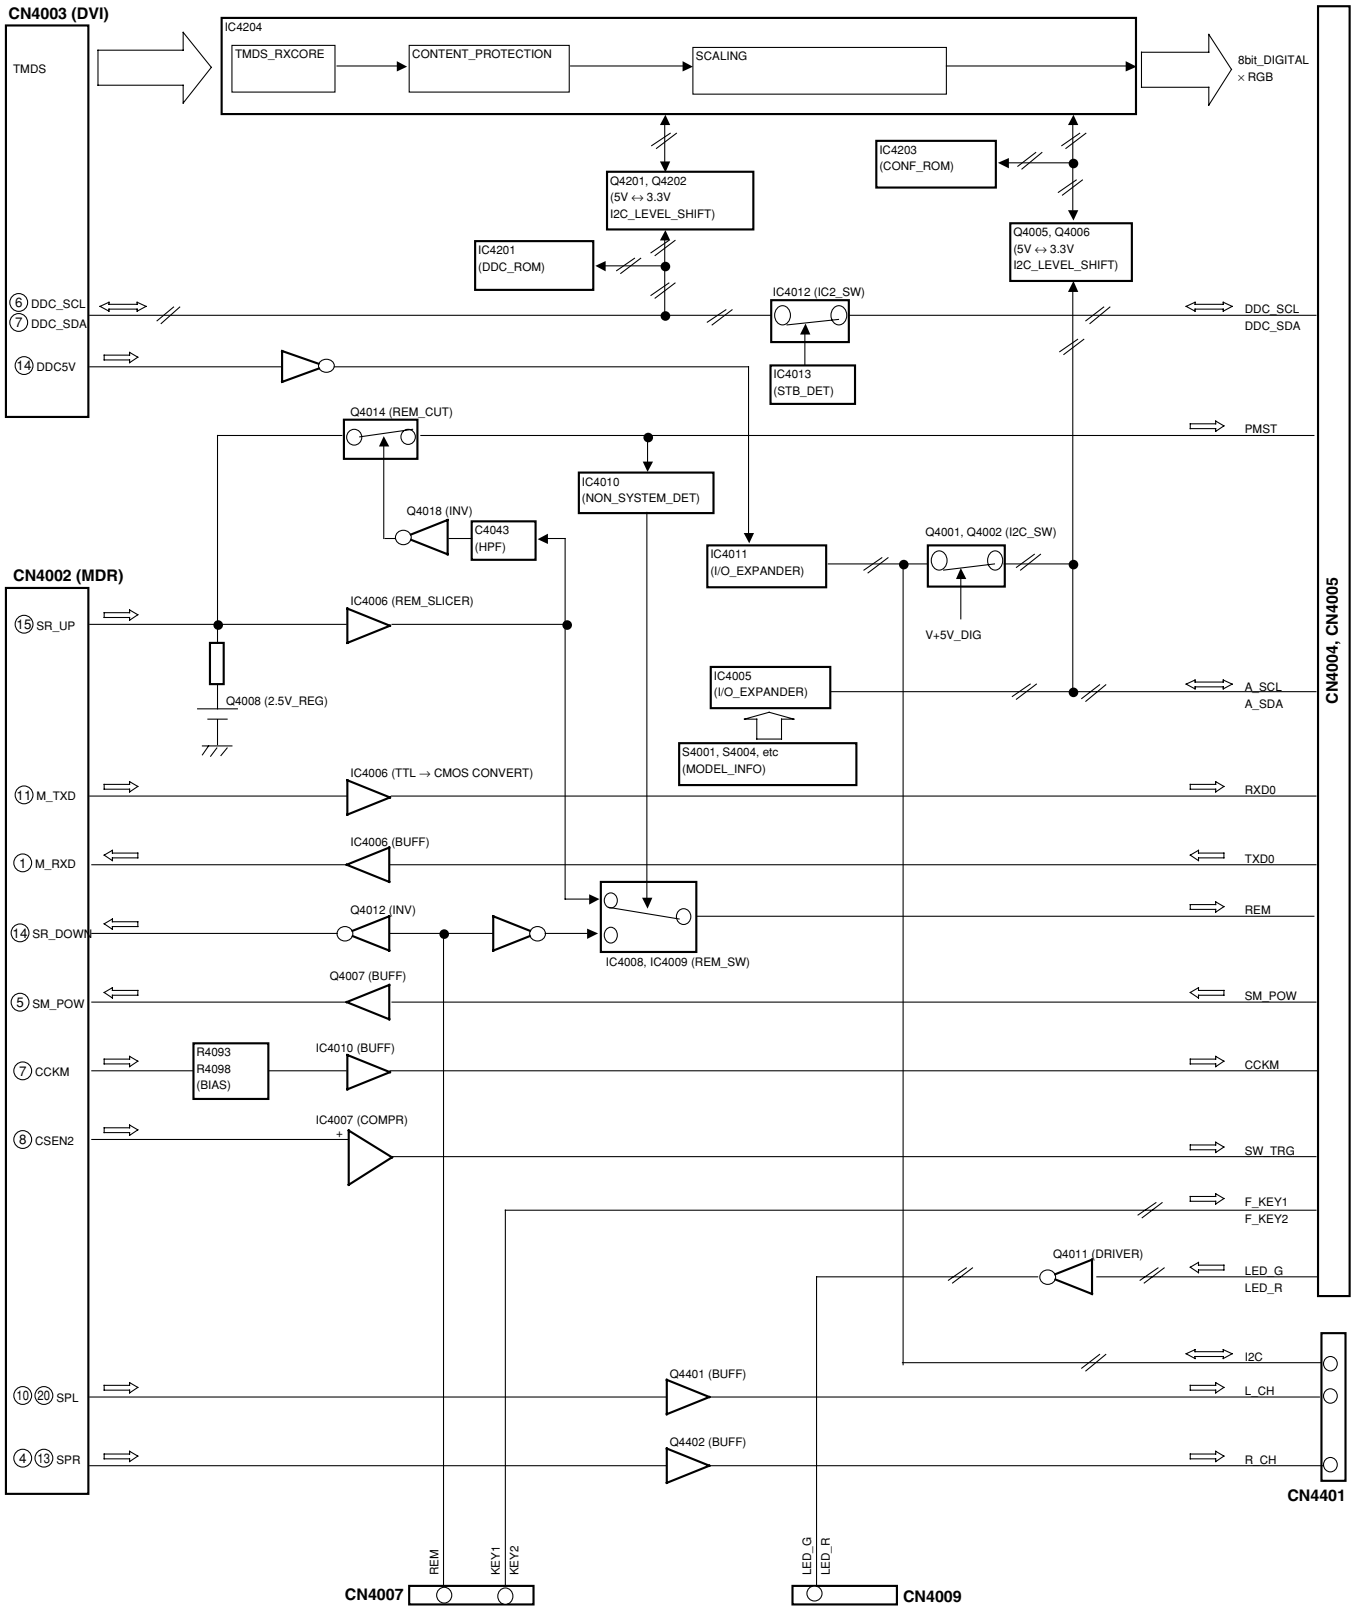

● Voltages

**CN4002 (MDR Connector) (↔ Media Receiver)**

No.	Name	Description	Voltage at INPUT4 NTSC Input
1	M_RXD	232C bus (PDP → MR)	0-5V swing square wave
2	GND		
3	SENCE	Connecting detection for MR	0.0V DC
4	SPR	Audio signal R ch	Analog audio signal wave
5	SMPOW	MR relay control	3.5V DC
6	GND		
7	CCKM	System activation detection	1.9V DC
8	CSEN2	System activation signal	5.0V DC
9	CSEN1	Not used	
10	SPL	Audio signal L ch	Analog audio signal wave
11	M_TXD	232C bus (MR → PDP)	0-3.3V swing square wave
12	GND		
13	SPR	Audio signal R ch	Analog audio signal wave
14	SR_DW	Remote control signal	5.0V DC
15	SR_UP	MDR connecting detection signal multiplex remote control signal	3.75V DC
16	GND		
17	FRASH_W	Not used	
18	SRST	Not used	
19	GND		
20	SPL	Audio signal L ch	Analog audio signal wave

**CN4003 (DVI Connector) (↔ Media Receiver)**

No.	Name	Description	Voltage at INPUT4 NTSC Input
1	RX2-	DVI signal	DVI signal
2	RX2+	DVI signal	DVI signal
3	GND		
4	NC		
5	NC		
6	DDC_SCL	I2C for DDC	0-5V swing square wave
7	DDC_SDA	I2C for DDC	0-5V swing square wave
8	NC		
9	RX1-	DVI signal	DVI signal
10	RX1+	DVI signal	DVI signal
11	GND		
12	NC		
13	NC		
14	DDC_+5V	I2C power supply for DDC	5.0V DC
15	GND		
16	HPD	HOT_PLUG detection	5.0V DC
17	RX0-	DVI signal	DVI signal
18	RX0+	DVI signal	DVI signal
19	GND		
20	NC		
21	NC		
22	GND		
23	RXC+	DVI signal	DVI signal
24	RXC-	DVI signal	DVI signal


**CN4004 (50P\_FFC Connector) (↔ DIGITAL VIDEO Assy)**

No.	Name	Description	Voltage at INPUT4 NTSC Input
1	GND		
2	GND		
3	NC		
4	NC		
5	NC		
6	NC		
7	BB0	8 bit video signal	0-3.3V swing square wave
8	BA0	8 bit video signal	0-3.3V swing square wave
9	BB1	8 bit video signal	0-3.3V swing square wave
10	BA1	8 bit video signal	0-3.3V swing square wave
11	BB2	8 bit video signal	0-3.3V swing square wave
12	BA2	8 bit video signal	0-3.3V swing square wave
13	BB3	8 bit video signal	0-3.3V swing square wave
14	BA3	8 bit video signal	0-3.3V swing square wave
15	BB4	8 bit video signal	0-3.3V swing square wave
16	BA4	8 bit video signal	0-3.3V swing square wave
17	BB5	8 bit video signal	0-3.3V swing square wave
18	BA5	8 bit video signal	0-3.3V swing square wave
19	BB6	8 bit video signal	0-3.3V swing square wave
20	BA6	8 bit video signal	0-3.3V swing square wave
21	BB7	8 bit video signal	0-3.3V swing square wave
22	BA7	8 bit video signal	0-3.3V swing square wave
23	GND		
24	GND		
25	NC		
26	NC		
27	NC		
28	NC		
29	GB0	8 bit video signal	0-3.3V swing square wave
30	GA0	8 bit video signal	0-3.3V swing square wave
31	GB1	8 bit video signal	0-3.3V swing square wave
32	GA1	8 bit video signal	0-3.3V swing square wave
33	GB2	8 bit video signal	0-3.3V swing square wave
34	GA2	8 bit video signal	0-3.3V swing square wave
35	GB3	8 bit video signal	0-3.3V swing square wave
36	GA3	8 bit video signal	0-3.3V swing square wave
37	GB4	8 bit video signal	0-3.3V swing square wave
38	GA4	8 bit video signal	0-3.3V swing square wave
39	GB5	8 bit video signal	0-3.3V swing square wave
40	GA5	8 bit video signal	0-3.3V swing square wave
41	GB6	8 bit video signal	0-3.3V swing square wave
42	GA6	8 bit video signal	0-3.3V swing square wave
43	GB7	8 bit video signal	0-3.3V swing square wave
44	GA7	8 bit video signal	0-3.3V swing square wave
45	GND		
46	GND		
47	NC		
48	NC		
49	GND		
50	GND		


**CN4005 (50P\_FFC Connector) (↔ DIGITAL VIDEO Assy)**

No.	Name	Description	Voltage at INPUT4 NTSC Input
1	NC		
2	NC		
3	NC		
4	NC		
5	RB0	8 bit video signal	0-3.3V swing square wave
6	RA0	8 bit video signal	0-3.3V swing square wave
7	RB1	8 bit video signal	0-3.3V swing square wave
8	RA1	8 bit video signal	0-3.3V swing square wave
9	RB2	8 bit video signal	0-3.3V swing square wave
10	RA2	8 bit video signal	0-3.3V swing square wave
11	RB3	8 bit video signal	0-3.3V swing square wave
12	RA3	8 bit video signal	0-3.3V swing square wave
13	RB4	8 bit video signal	0-3.3V swing square wave
14	RA4	8 bit video signal	0-3.3V swing square wave
15	RB5	8 bit video signal	0-3.3V swing square wave
16	RA5	8 bit video signal	0-3.3V swing square wave
17	RB6	8 bit video signal	0-3.3V swing square wave
18	RA6	8 bit video signal	0-3.3V swing square wave
19	RB7	8 bit video signal	0-3.3V swing square wave
20	RA7	8 bit video signal	0-3.3V swing square wave
21	GND		
22	CLK	Clock	0-3.3V swing square wave (40MHz)
23	GND		
24	DE	Data enable	0-3.3V swing square wave (+ polarity)
25	GND		
26	HD	Horizontal sync. signal	0-3.3V swing square wave
27	GND		
28	VD	Vertical sync. signal	0-3.3V swing square wave (- polarity 48.4kHz)
29	GND		
30	A_SCL	I2C bus	0-5V swing square wave
31	F_KEY1	Front key signal 1	5.0V DC
32	PMST	MDR connection Detect signal	3.75V DC
33	SMPOW	MRrelay control	5.0V DC
34	A_MUTE	Audio mute	0.0V DC
35	CCKM	System activation detect	1.9V DC
36	M_STATE	Si1861 I2C bus master information	0.0V DC
37	SW_STC	Not used	
38	A_NG	Not used	
39	SW_TRG	System activation signal	5.0V DC
40	F_KEY2	Front key signal 2	5.0V DC
41	A_SDA	I2C bus	0-5V swing square wave
42	*LED_G	Green LED control signal	0.0V DC
43	TXD0	232C bus	0-5V swing square wave
44	*LED_R	Red LED control signal	5.0V DC
45	RXD0	232C bus	0-5V swing square wave
46	DDC_SCL	I2C for DDC	0-5V swing square wave
47	REM	Remote control signal	5.0V DC
48	DDC_SDA	I2C for DDC	0-5V swing square wave
49	GND		
50	GND		

3.1.3 DIGITAL VIDEO ASSY

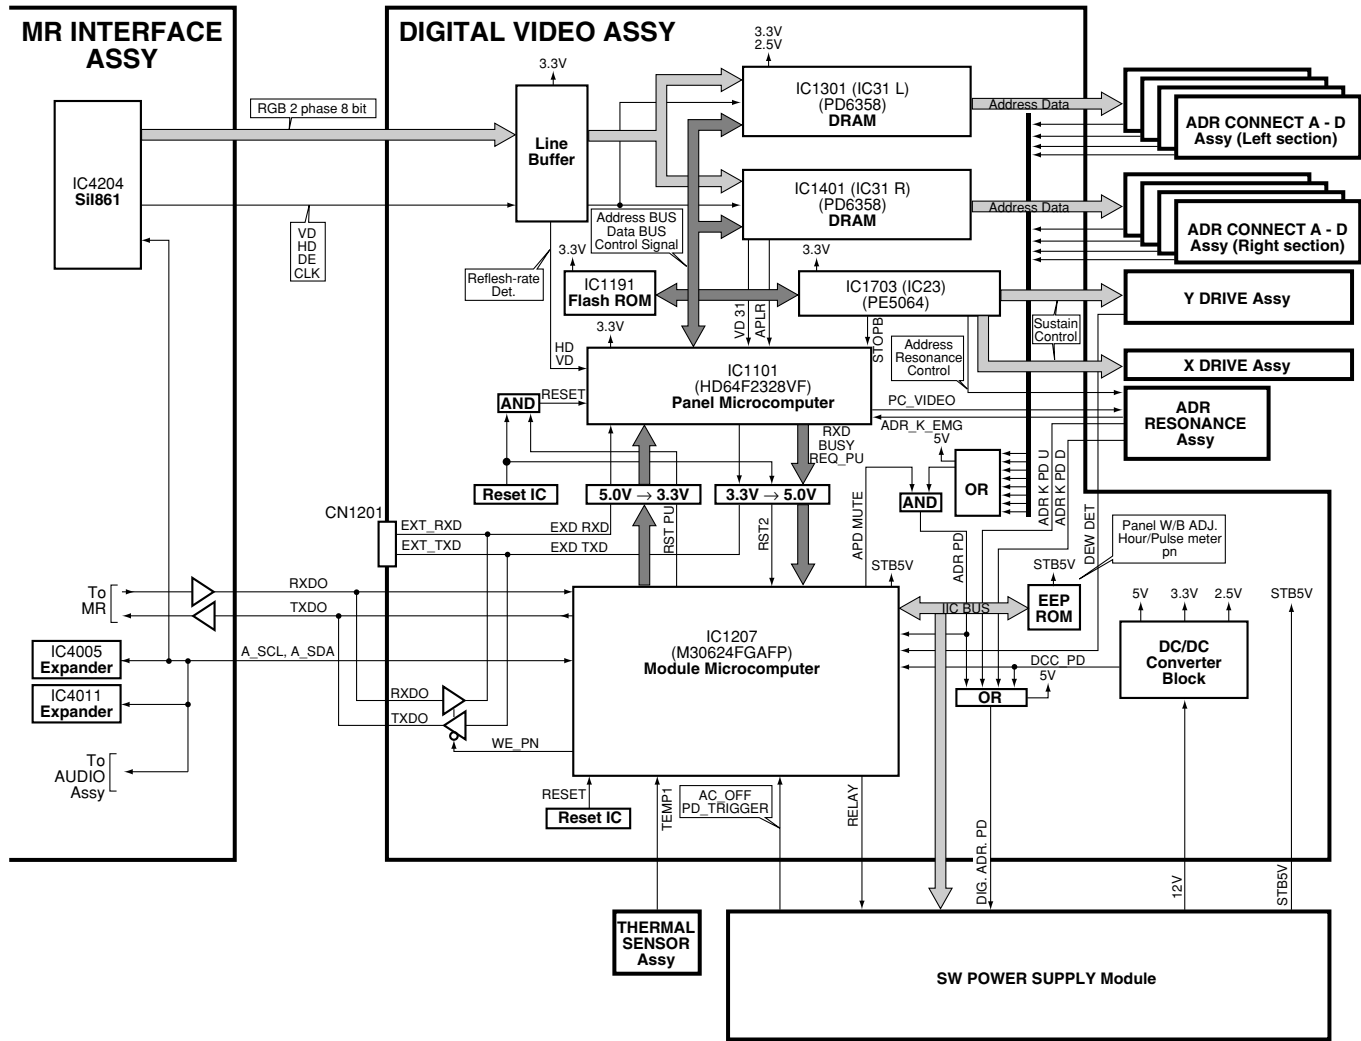



3.1.4 X DRIVE ASSY

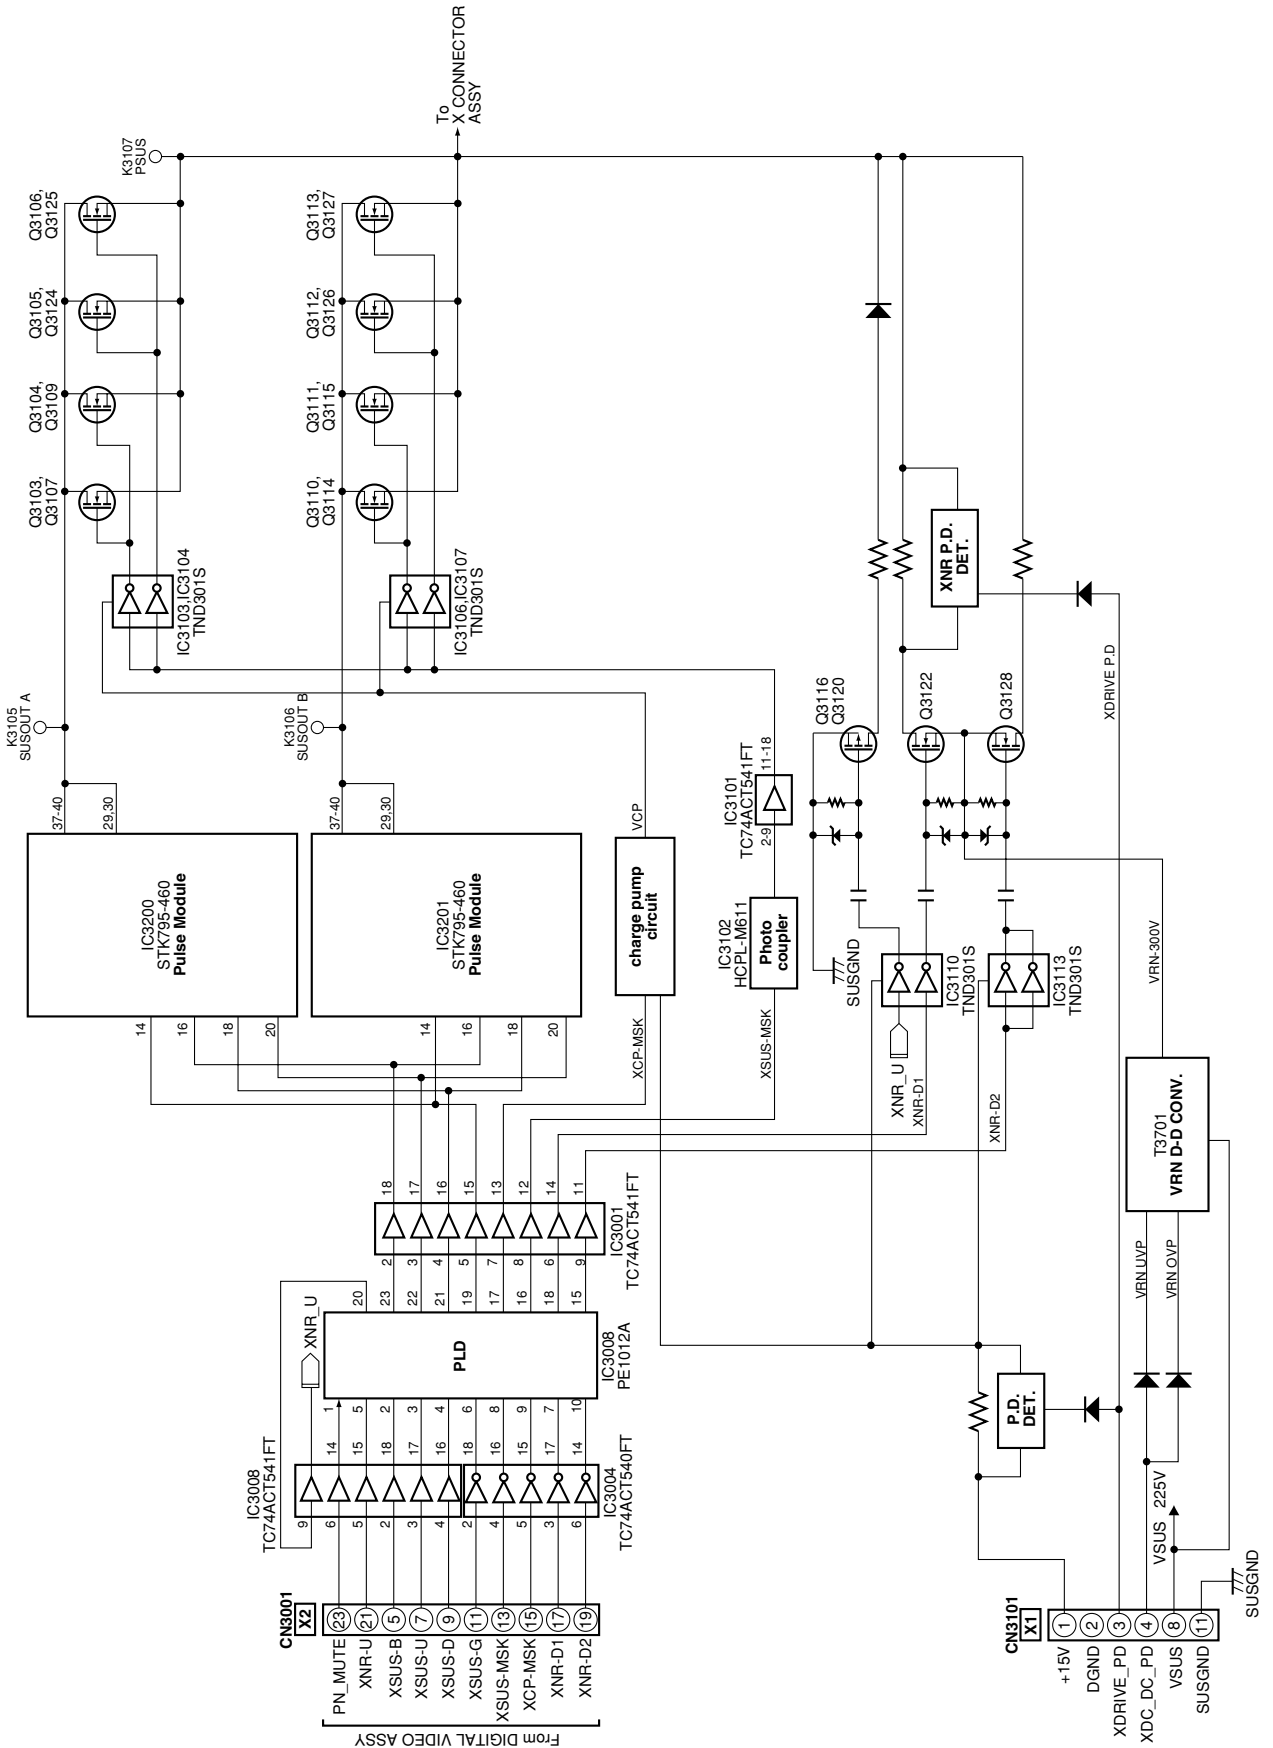

A  
B  
C  
D


3.1.5 Y DRIVE ASSY

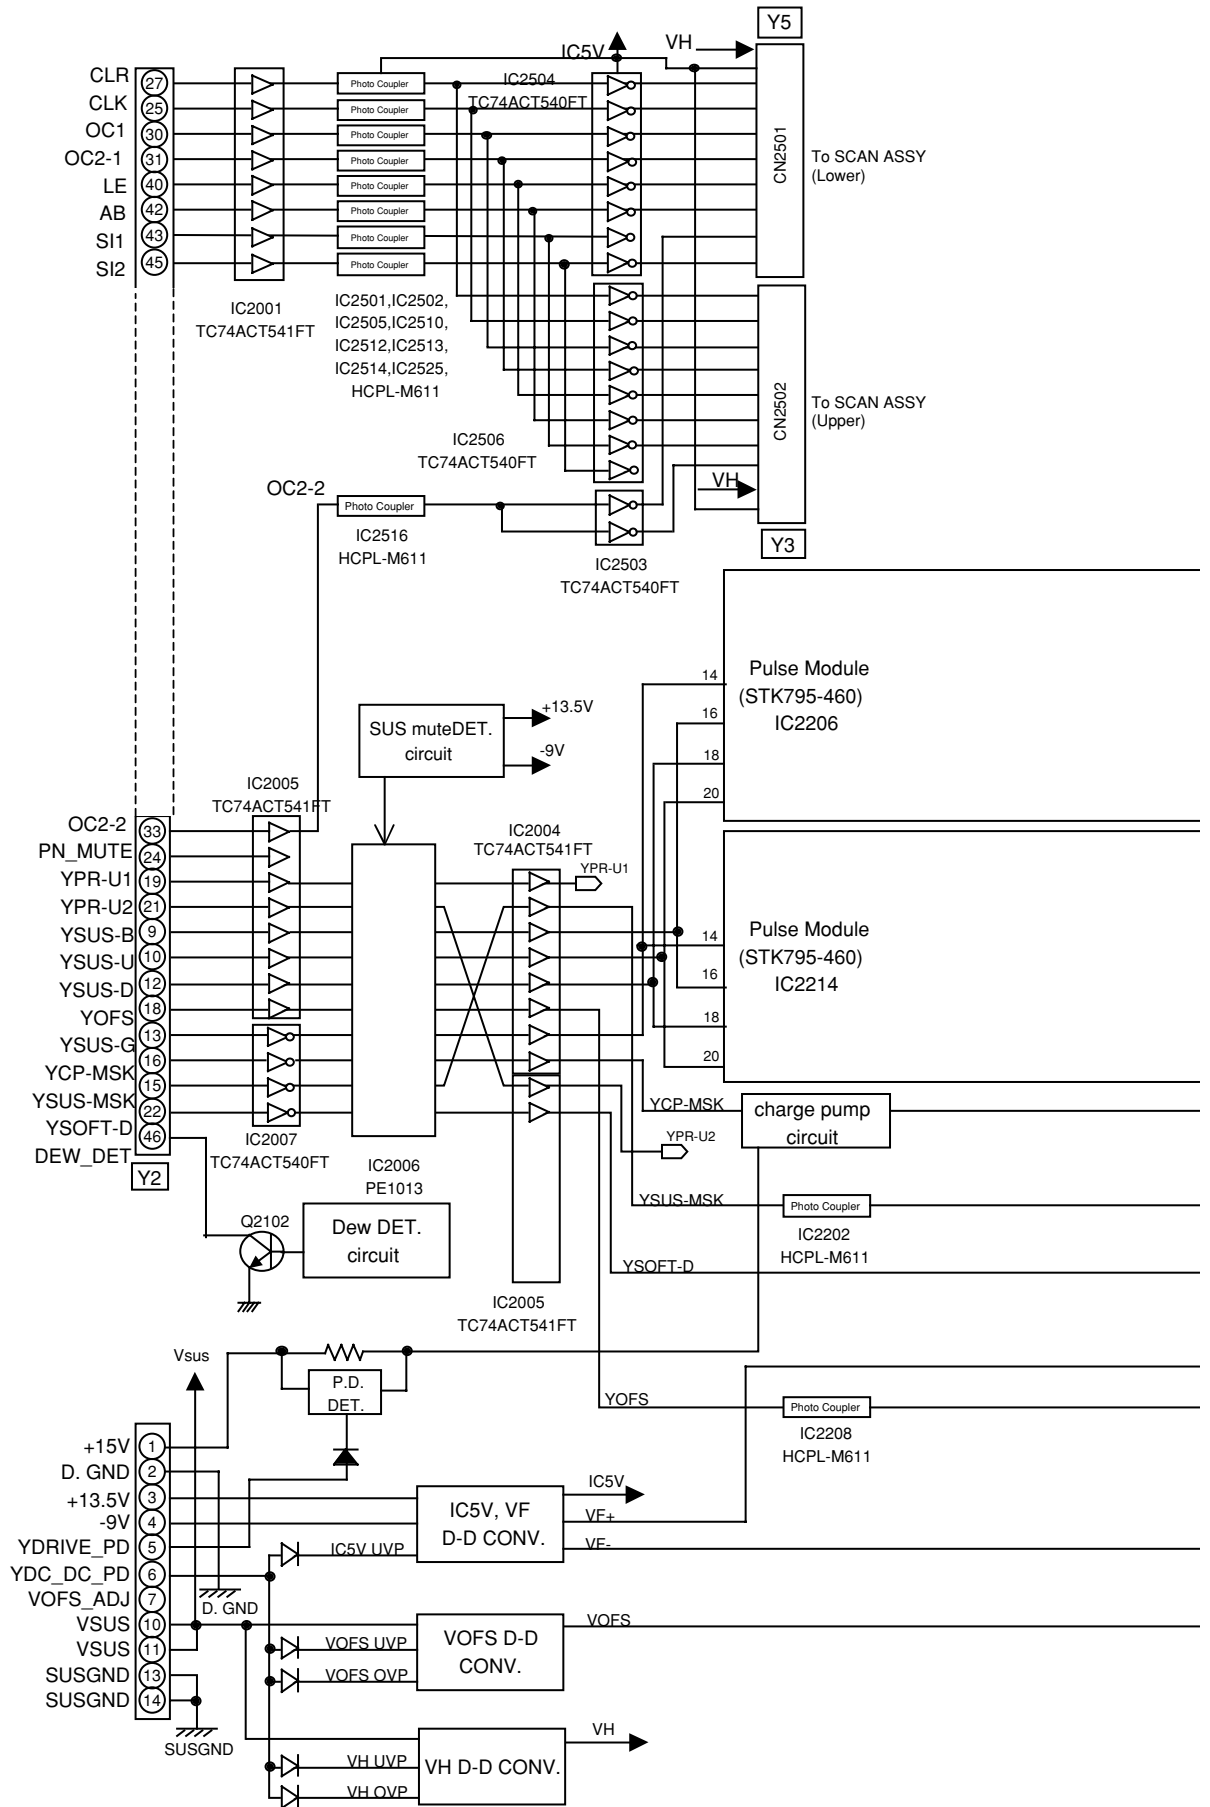

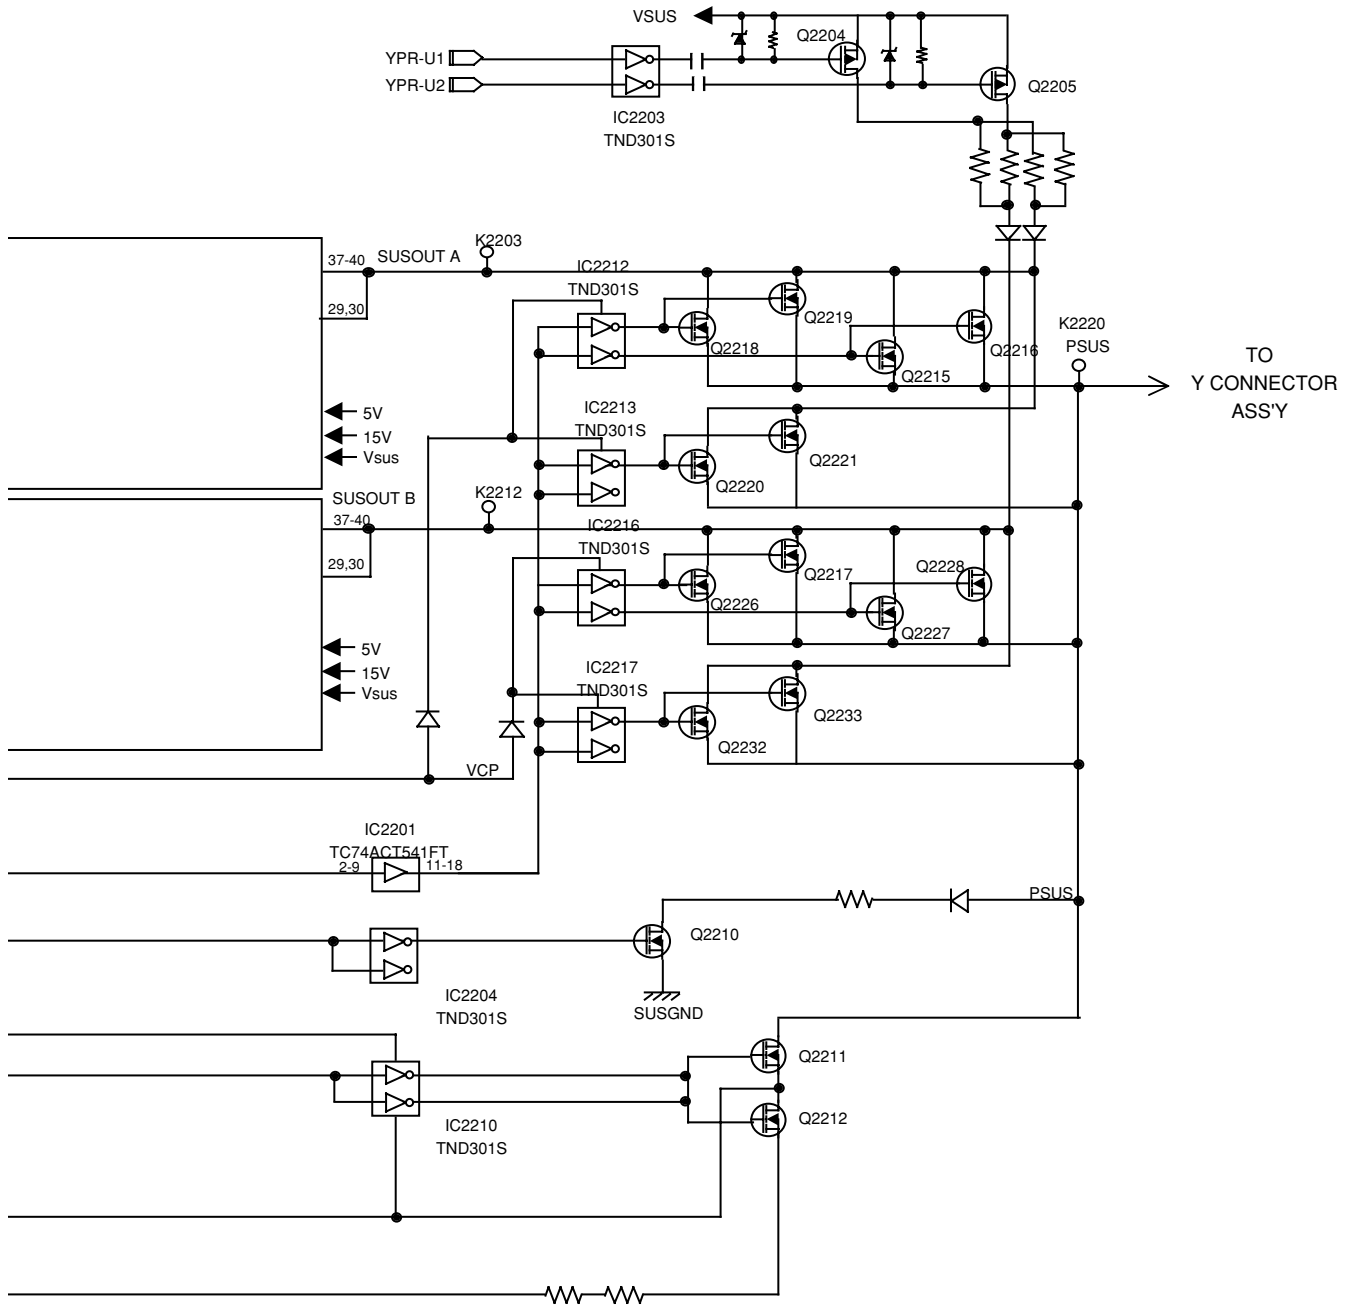





3.1.6 SUB ADDRESS A and B ASSYS

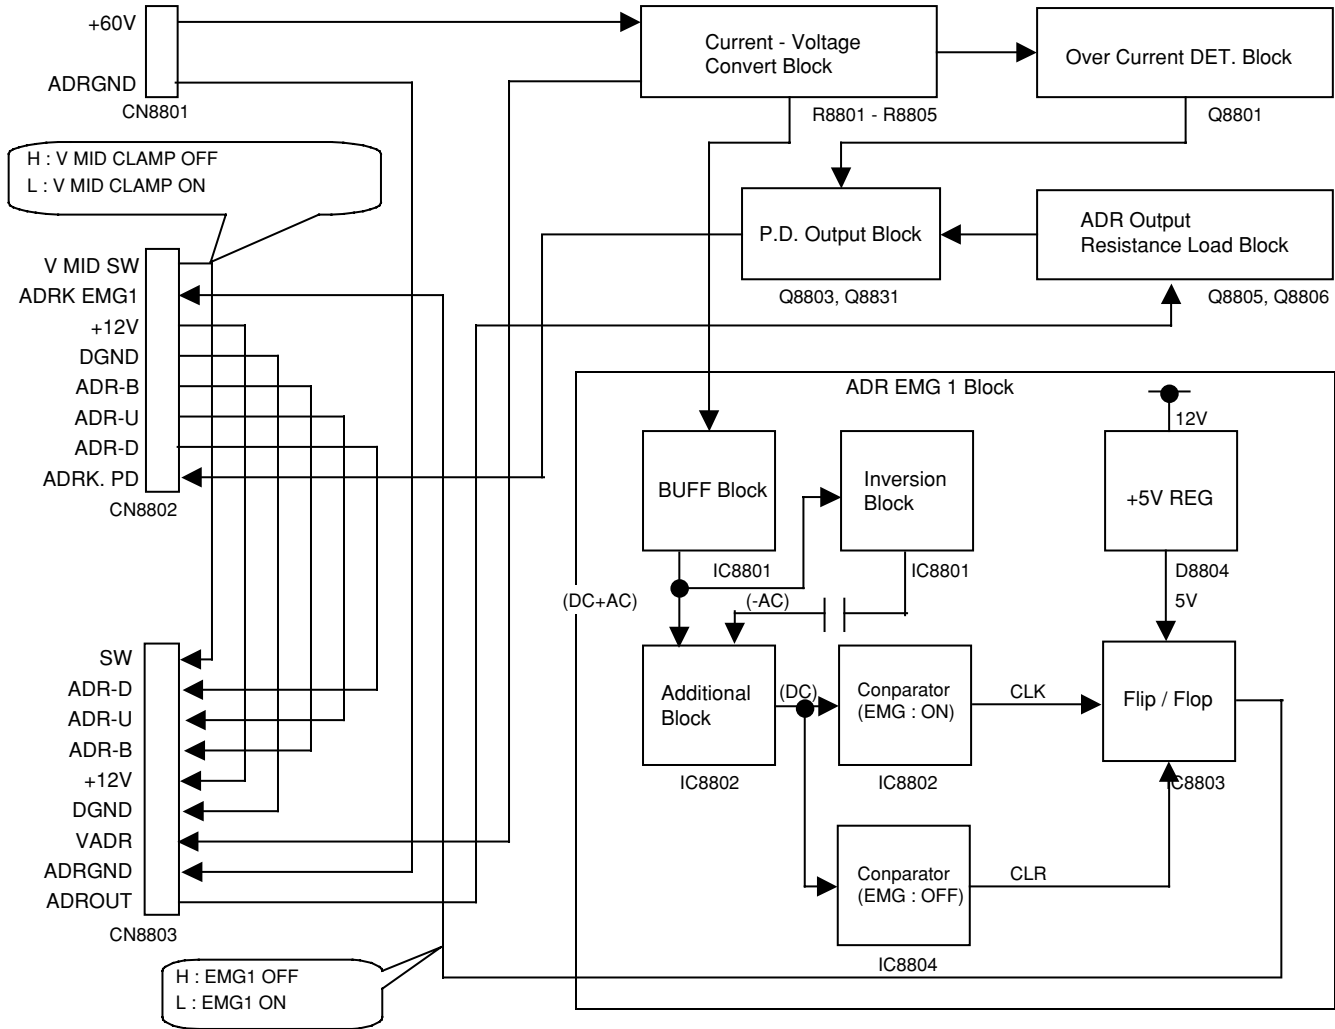


3.1.7 ADR RESONANCE ASSY

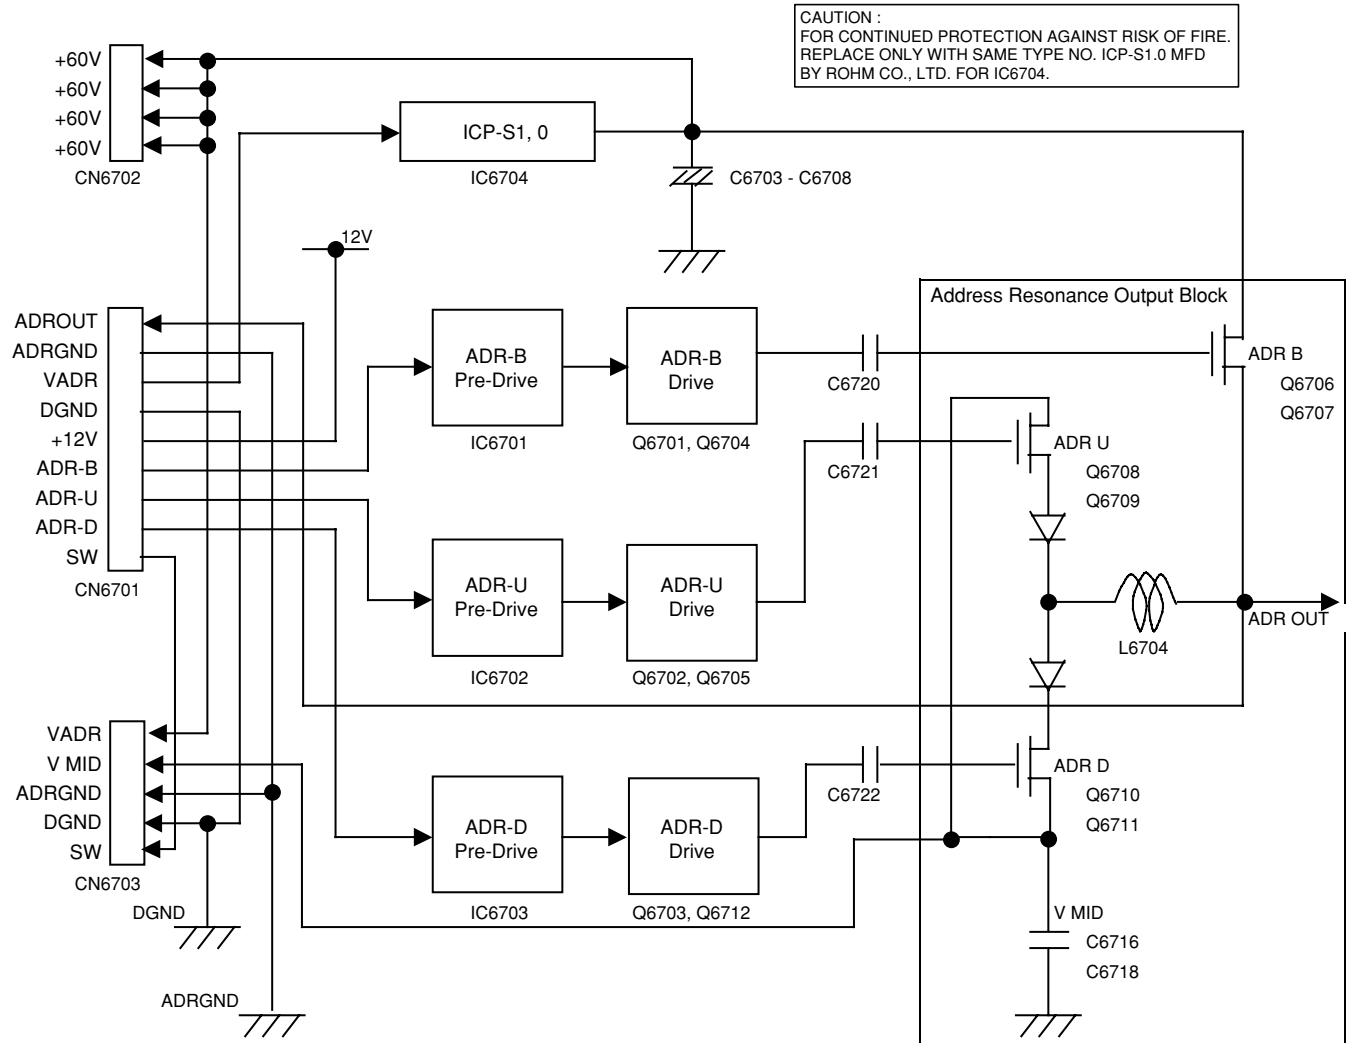

3.1.8 ADR CONNECT A, B, C and D ASSYS

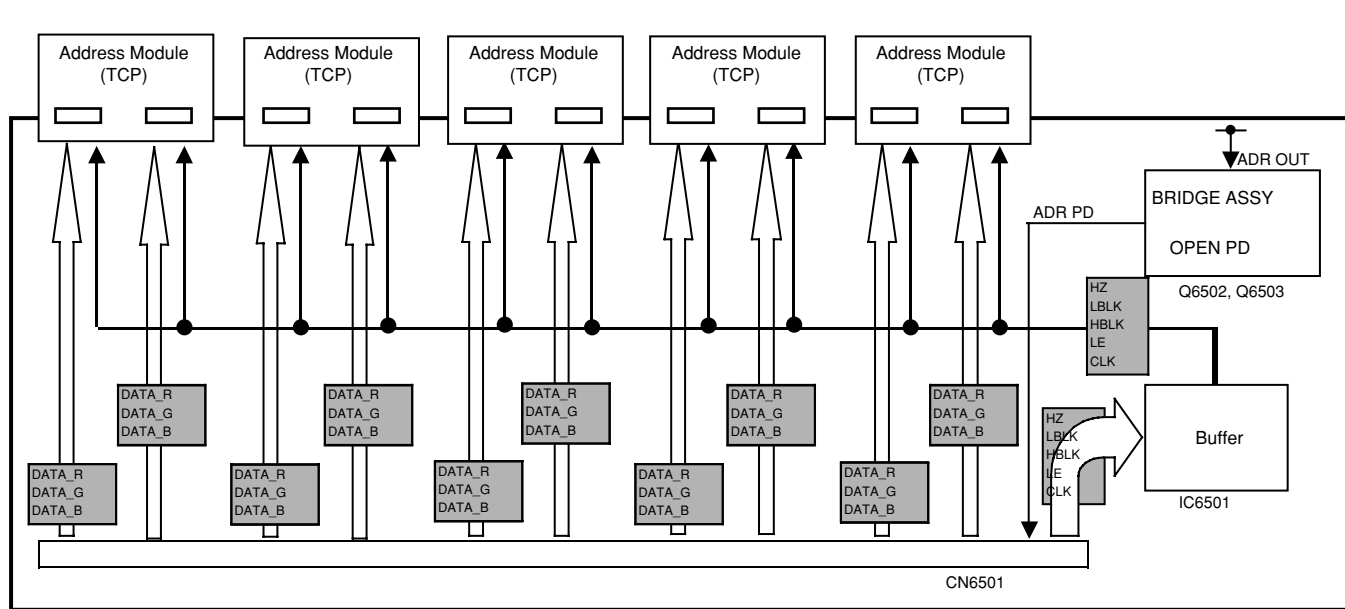

3.1.9 V MID CLAMP ASSY

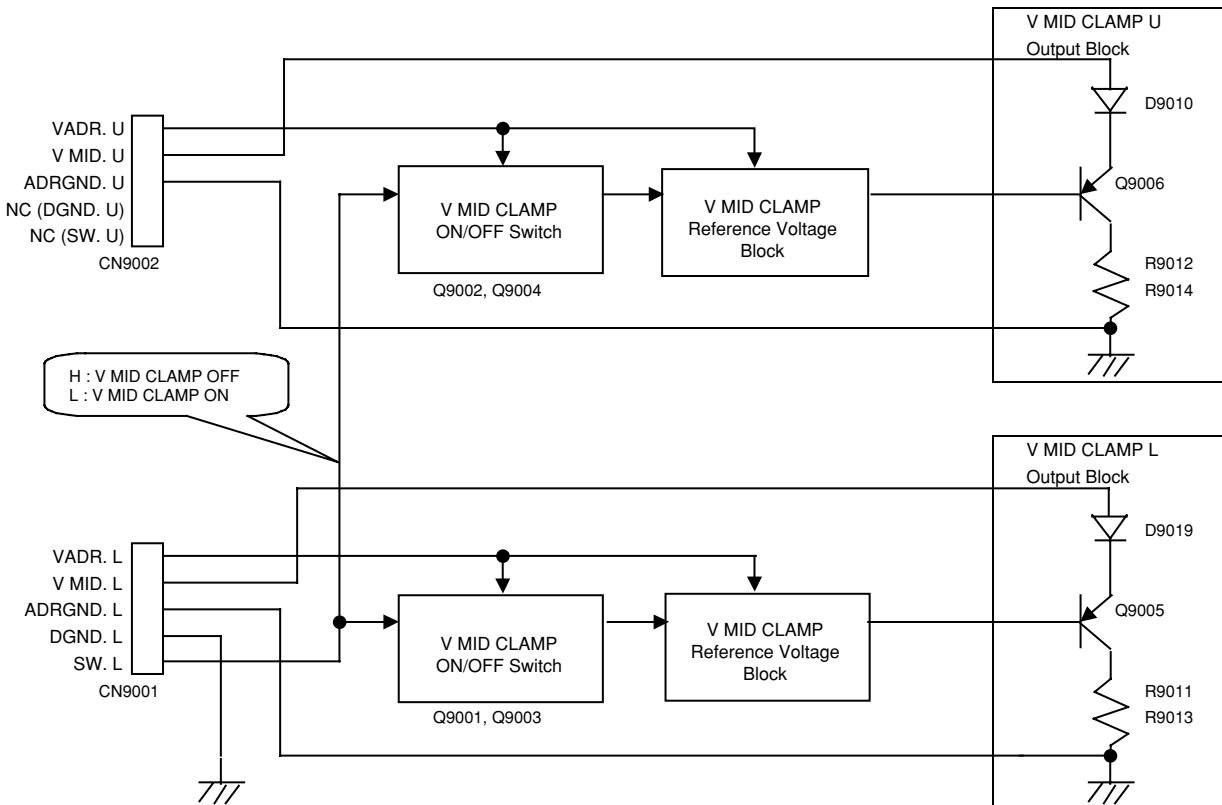

### 3.1.10 AUDIO AMP and SP TERMINAL ASSYS

#### AUDIO AMP ASSY

IC5202 (CXA2021S)


No.	Voltage (V)	No.	Voltage (V)
1	5.9	12	5.25
2	0	13	1.73
3	5.95	14	5.95
4	5.94	15	5.92
5	5.98	16	5.91
6	6.02	17	5.93
7	6.02	18	5.92
8	7.38	19	5.94
9	5.95	20	5.95
10	1.55	21	11.91
11	5.24	22	5.9

IC5201 (NJM2193L)

No.	Voltage (V)	No.	Voltage (V)
1	5.95	16	11.91
2	5.94	17	0
3	5.84	18	0
4	5.98	19	5.98
5	5.98	20	5.91
6	5.97	21	5.97
7	5.98	22	5.98
8	5.98	23	5.98
9	5.98	24	5.98
10	5.97	25	5.97
11	5.97	26	5.98
12	5.98	27	5.98
13	5.96	28	5.84
14	5.98	29	5.94
15	0	30	5.95

IC5002 (LA4628)

No.	Voltage (V)
1	1.6
2	7.5
3	0
4	3.37
5	2.29
6	1.6
7	1.97
8	7.3
9	7.3
10	0
11	7.3
12	0
13	7.3
14	15

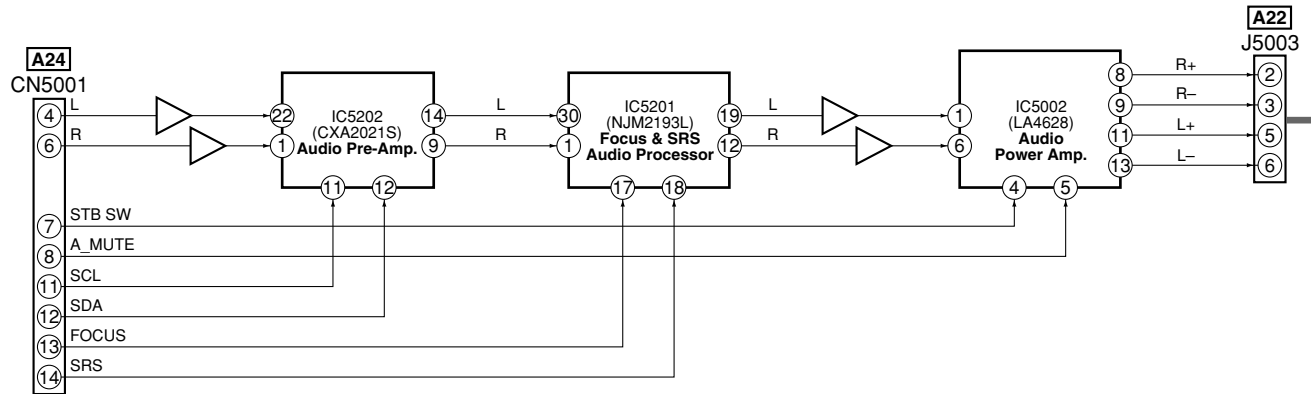

#### SP TERMINAL ASSY

